

# SUM1490, SUM1490-S, SUM1490-GR

LED indicators

VANDERBILT



## Key Features include:

- Compact size
- Aesthetically pleasing
- Quick & simple to install
- High visibility LED
- Wide light diffusion
- 12 or 24VDC operation
- Buzzer option available


# SUM1490, SUM1490-S, SUM1490-GR

## LED indicators

VANDERBILT

### Description

High visibility LED's are ideal for notification purposes. The compact size and low current draw of the optical and optical acoustic repeaters makes them ideal for the signalling of alarms and anomalies. They are commonly installed in joint use with a detection unit in false ceilings and floating floors. Available with a wide variety of LED colour variants and with an internal buzzer option, the optical repeaters offer clear visual indication suitable for a range of applications.

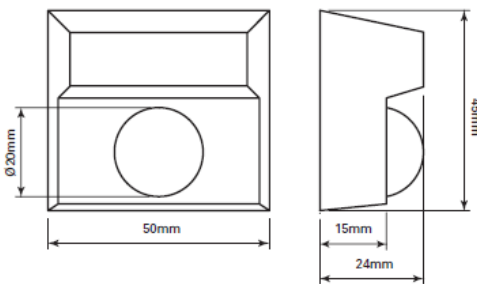

### ■ Technical Specifications

Supply voltage (12 V or 24V)	12 ... 24 VDC
Current consumption - 12v/24v	Constant red LED 10mA Constant green LED 20mA Constant buzzer 20mA
Housing - Material - Colour	Thermoplastic White
Indications - SUM1490 - SUM1490-S  - SUM1490-GR	LED indication red LED indication red & internal buzzer 75 dB at 0.3m, option for pulsed or constant – 2300 Hz, 0.5s On/Off. LED indication green
Ambient conditions - Operating temperature - Housing protection (EN60529)	-20 ... +60 °C IP40
Dimensions (H x W x D)	45 x 50 x 24 mm

### ■ Ordering Information

Type	Art.-No.	Description	Weight
SUM1490	N54539-Z158-A100	LED indication, red	21g
SUM1490-S	N54539-Z160-A100	LED indication red, c/w buzzer	21g
SUM1490-GR	N54539-Z159-A100	LED Indication, green	21g

Issued by  
Vanderbilt  
Clonshaugh Business and  
Technology Park  
Clonshaugh  
Dublin 17  
Ireland  
www.vanderbiltindustries.com

Data and design subject to change without notice.  
Supply subject to availability.