

# ÖFK-200 & ÖFK-200-N

Hold up device

**VANDERBILT**



## Key Features include:

- Optional indication of operation
- Latching or momentary versions
- Single push buttons
- Gold plated contacts for long term, reliable operation
- Tamper for cover removal
- Simple reset for latched version- no keys required
- Robust construction
- Flexible configuration options
- Silent electronic relays
- LED indication of operation

# ÖFK-200 & ÖFK-200-N

Hold up device

VANDERBILT

## Description

The ÖFK-200 Series Personal attack buttons are mechanical buttons aimed for banks, gas stations, warehouses, governmental institutions or other places where you can expect a threat.

The contact function is gold-plated, not oxidizing, giving a long lasting working performance.

It is reliable in function and not sensitive to bumps that can trigger a false alarm.


It is well adapted to modern alarm systems with a low loop current.

The push buttons are equipped with screw terminals with wire guard and extra free terminals.


The ÖFK-200-N is a latching push-button alarm switch with normally closed contacts. Operation of the button will release the alarm contacts and the reset is performed, when the button is depressed.

This switch includes a red LED alarm indicator connected in series with a 470 Ohm resistor.

The ÖFK-200 is a momentary push-button alarm switch with normally closed contacts. Operation of the button will release the alarm contacts and the reset is performed, when the button is released.

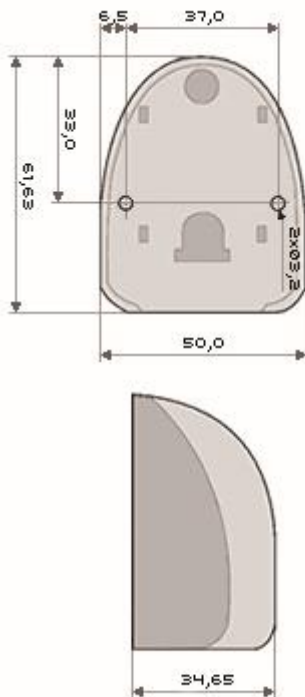

Only the ÖFK-200-N has connection terminals (1 = - & 2 = +) for the remote confirmation LED indication.

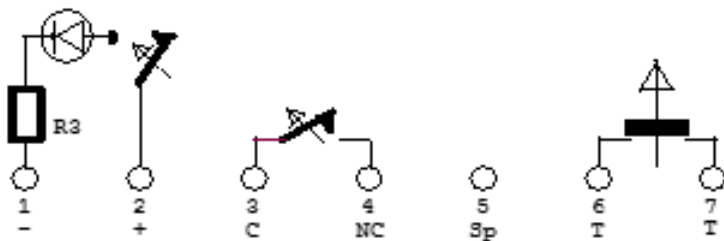

VANDERBILT

# ÖFK-200 & ÖFK-200-N

VANDERBILT

## ■ Technical Specifications

Supply voltage for LED	9...15V DC
Tamper contact	1 x N/C
Alarm Contacts	
- ÖFK-200	1 x changeover contact
- ÖFK-200-N	1 x changeover contact
Housing	
- Colour	White
- Material	ABS
Switching voltage	
- Alarm contacts	30V DC/100mA
- Tamper contacts	35V DC/50mA
Operational life	>10,000 switches at 40mA
Cable connection	Screw terminals
Alarm confirmation indication	Red LED, ÖFK-200
Environmental	
- Operating temperature	-10 ... +55 °C
- Housing protection	IP31
- Humidity	85%
Dimensions (Lx W x H)	60 x 50 x 35mm

## ■ Ordering information

Type	Art.-No.	Description	Weight
ÖFK-200	N54543-Z125-A100	Hold up button, momentary	0.037 Kg
ÖFK-200-N	N54543-Z126-A100	Hold up button, latching with LED indicator	0.037 Kg

VANDERBILT