


# IRRM1, IRRM2 & IRRM3

Relay Control Units

VANDERBILT

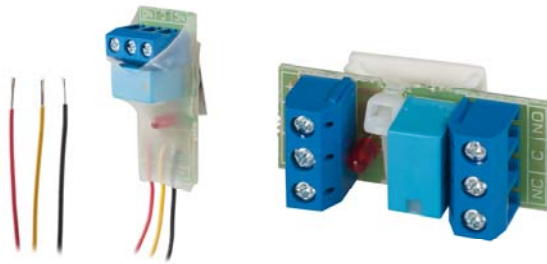

## Key Features include:

- Converts open collector outputs to volt free contacts
- Wide operating voltage range
- Low current consumption
- Discrete and compact

# IRRM1, IRRM2 & IRRM3

## Relay Control Units

VANDERBILT

### ■ Technical Specifications

	IRRM1	IRRM2	IRRM3
Supply voltage		9...30 V DC	
Current consumption	12...21 mA	12...21 mA	12...21 mA
Relay Type	SPDT	SPDT	SPDT
Contact rating		30W, 30V AC/DC 1A	
Dimensions (L x W x H) mm	38 x 16 x 14	37 x 16 x 14	38 x 27 x 14
Indication (+ve, -ve & control – ve)		Red LED	
Output	3 x screw terminals	3 x screw terminals	3 x screw terminals
Operating Temperature	-10...+70°C	-10...+70°C	-10...+70°C
Mounting	Self-adhesive pad	-	Self-adhesive pad

### ■ Ordering Information

Type	Art No.	Description	Weight
IRRM1	N54592-Z142-A100	Relay Control Unit	0.020 kg
IRRM2	N54592-Z143-A100	Relay Control Unit	0.025 kg
IRMM3	N54592-Z144-A100	Relay Control Unit	0.030 kg

